

MIPOLAM® AMBIANCE ULTRA™
CLASSIC & TRENDY

gerflor.com
gerflor.asia



NEW




evercare™ SURFACE TREATMENT

EXCLUSIVE PATENTED TECHNOLOGY BY GERFLOR®

THE BEST CHEMICAL STAIN RESISTANCE SURFACE TREATMENT

evercare™ BY GERFLOR : Treatment durability




Gerflor®:
Even thickness



100% non-porous surface
Water-repellent effect


Other treated floor covering



Competitor:
Missing treatment
and uneven
thickness




Non-treated product



100% HYGIENIC

► No contamination
& bacteria
development

EASY AND COST EFFECTIVE MAINTENANCE

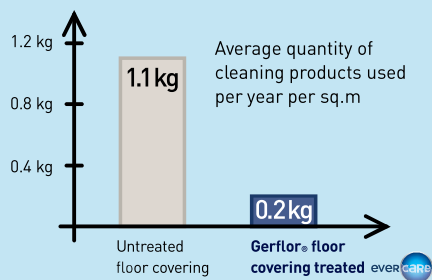

► 80% less water
and detergent
use for cleaning

USER'S BENEFITS


| Easy & cost-effective maintenance
| No wax for life

| Stain barrier
| Chemical resistance

COMPLEMENTARY RANGES

WALL SOLUTIONS

- ① **100% SAFETY**
LINEA'TOUCH handrail
- ② **100% PROTECTION**
Mural Plus or wall protection DECOCHOC combined with LINEA'punch bumper
- ③ **100% WATERPROOF**
Perfect hot-welded joint between floor and wall to reduce bacterial activity
- ④ **100% HYGIENIC**
 - Skirting and coving solutions: no areas where particles or bacteria can stagnate
 - Easy to clean

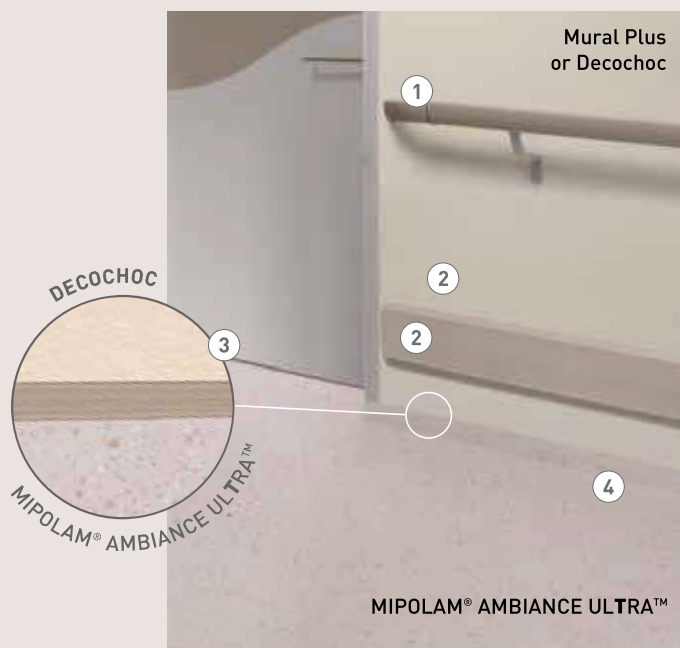

MIPOLAM® AMBIANCE ULTRA™



MIPOLAM® AMBIANCE ULTRA™ Classic



Timeless design



Our best seller



High value
for money



Top chemical and
stain resistance
on the market

FEWER VOC'S, BETTER INDOOR AIR QUALITY

INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



RECYCLABILITY

- 100 % recyclable product



LCA

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001 and Iso 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Patented surface treatment Evercare™ to reduce drastically the use of chemical products and water and ensure the lowest environmental impact



COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



RECYCLED CONTENT

- 100 % REACH compliant recycled content



WELLNESS

Health

- Antibacterial activity (inhibits growth > 99 %)

Comfort

- Walking comfort < 75 dB



Classic



2071 Imperial Red




2078 Corn



2073 Vanilla



2072 Terracotta

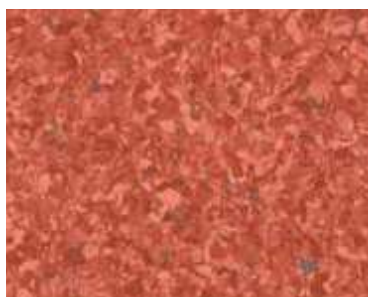

2074 Pumkin



2079 Capuccino



2080 Espresso



2059 Camel



2060 Sahara




Classic



2055 Opale



2054 Cloud

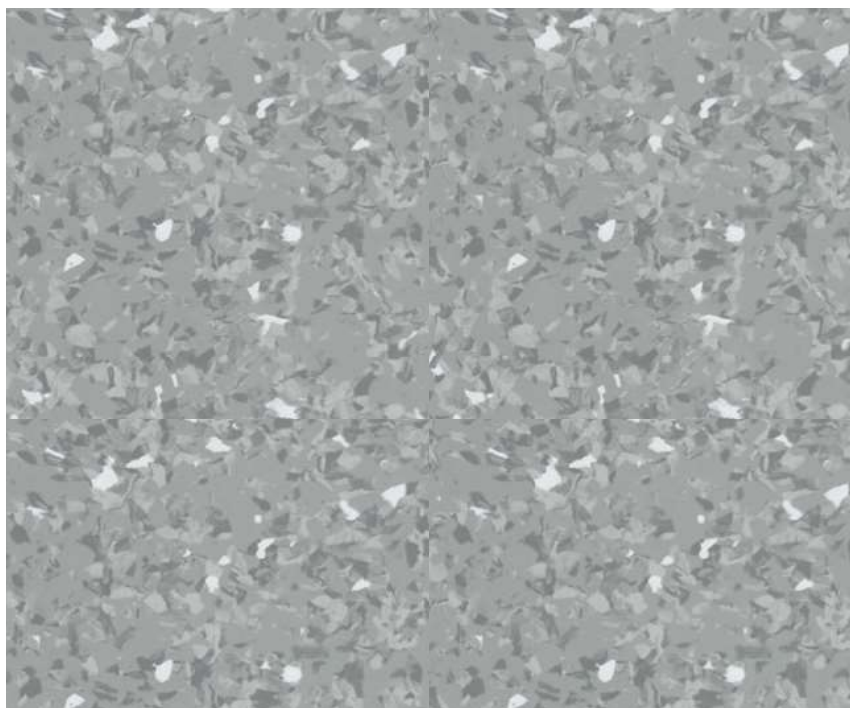

2053 Mouse



2056 Deer




2051 Charcoal



2052 Ash



2057 Coffee

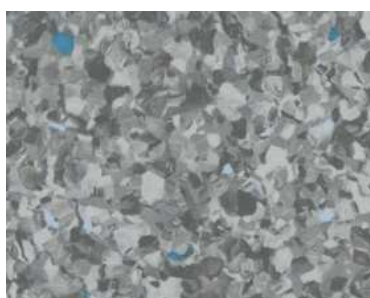

2076 Storm




2050 Midnight



Classic



2062 Beach

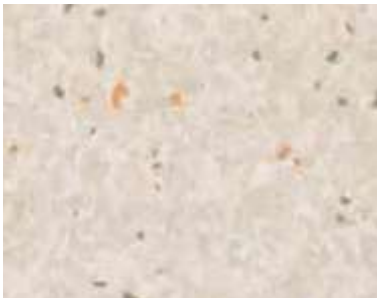


2084 Cream




2061 Sand



2077 Latte

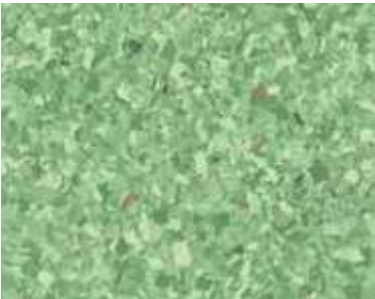

2065 Bamboo

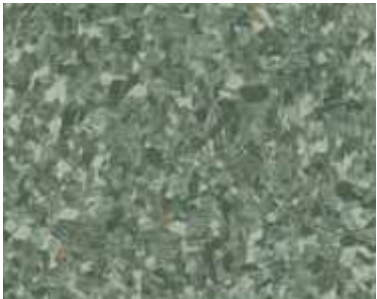

2064 Hunting



2058 Fog



2063 Emerald




2066 Forest



Classic




2070 Ink Blue

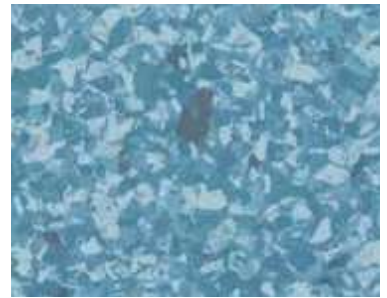

2069 Sky



2081 Cobalt

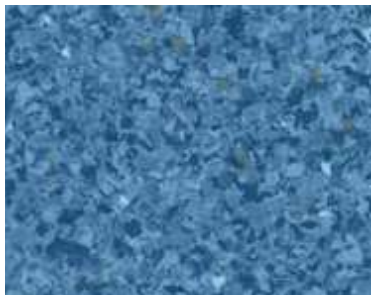


2067 Pool



2068 Sea Blue



2082 Ocean

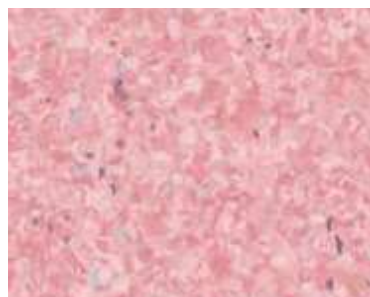

2083 Candy



2075 Lavender



MIPOLAM® AMBIANCE ULTRA™

gerflor.com
gerflor.asia

Mipolam® Ambiance Ultra™ is a homogeneous pressed compacted floorcovering in sheet, with non-directional design, colour dyed as a raw mixture to ensure even color throughout the thickness and a matt finish. Its surface is densely compacted for improved wear and ease of maintenance. It is treated with Evercare™, the latest improvement in polyurethane special maintenance treatment obtained by UV laser crossing-linking. Evercare™ avoids staining of chemical products, like betadine, eosin, or anti-bacterial hand gel and increases the durability of the flooring. No wax for life!

Mipolam® Ambiance Ultra™ incorporates bacteriostatic and fungistatic actions. The flooring complies with the EN 649 [34-43] and has a Group T wear rating. It is suitable for very heavy traffic areas.

Mipolam® Ambiance Ultra™ is available in a wide pallet of 50 classic and trendy colors.

MIPOLAM® AMBIANCE ULTRA™			
DESCRIPTION			
Total thickness	ISO 24346 (EN 428)	mm	2
Weight	ISO 23997 (EN 430)	g/m²	2750
Width of sheet	ISO 24341 (EN 426)	cm	200
Length of sheet	ISO 24341 (EN 426)	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	ISO 10581(EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	< 2
Electrical resistance	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance dry	EN 13893	-	≥ 0.3
Slip resistance wet	DIN 51130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2,0
Wear group	EN 649	group	T
Type binder content	ISO 10581	type	I
Dimensional stability	ISO 23999 (EN 434)	%	≤ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≈ 0.03
Castor chair test	ISO 4918 (EN 425)	-	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/[m.K]	≈ 0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical products resistance	ISO 26987 (EN 423)	-	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Surface treatment	-	-	Evercare™
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196		>99 % Inhibits growth
Color number	-	-	50
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m³	< 10
Certification	-	-	Floorscore™
CE MARKING			
CE	EN 14041	-	

[1] The implementation of an effective cleaning regime is the most important defence against infections.

Gerflor

Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

MIPOLAM® AMBIANCE ULTRA™, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION

100 % REACH compliant



INDOOR
AIR QUALITY

100 times lower than
norm requirements
(TVOC <10 µg/m³ after 28 days)



RECYCLED
CONTENT

100 % REACH compliant
recycled content



RECYCLABILITY

100 %



LCA

Eco-designed according
to a product specific
life cycle analysis



WELLNESS

Walking comfort:
< 75 dB

Be connected!



#Gerflor



www.gerflor.com

Gerflor®

theflooringroup

GERFLOR ASIA Tel.: +