

Solid


3.0(T)X450X450(Wear Layer:0.55/0.3) [mm]  
2.5(T)X450X450(Wear Layer:0.55) [mm]  
2.0(T)X450X450(Wear Layer:0.3) [mm]



1709 | Beige



1710 | Light Brown

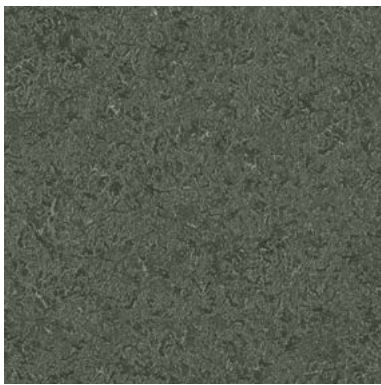

1711 | Black



1712 | Light Grey




1713 | Middle Grey




1714 | Dark Grey

Woven


3.0(T)X600X600(Wear Layer:0.55/0.3) [mm]

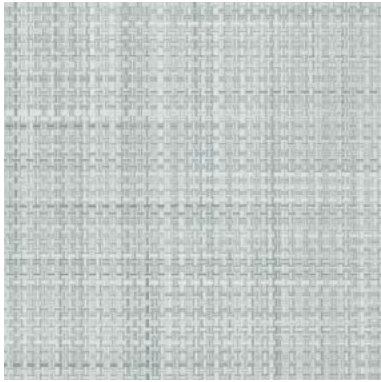


6330 | White

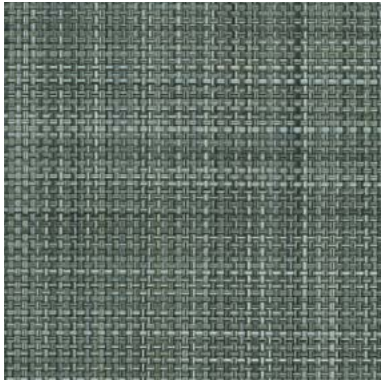


6325 | Cool Grey

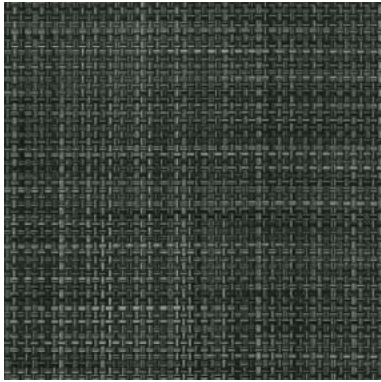

6328 | Black

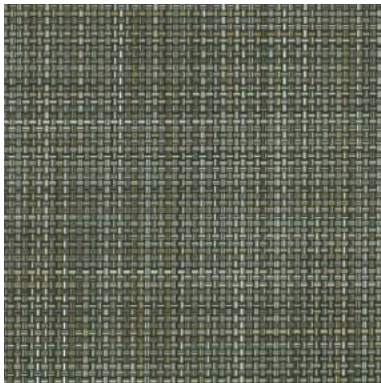

6327 | Brown Grey

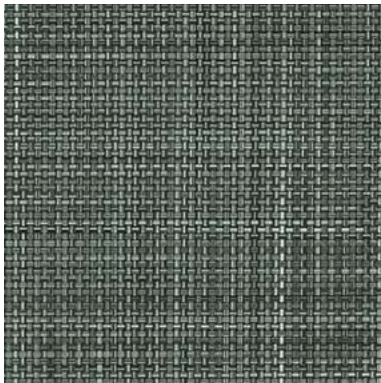

6329 | Dark Grey

DECOTILE

- 51 styles available in 4 different specifications, suitable for both residential and light & heavy commercial use.

- Free of 6 types of harmful phthalate plasticizers: DEHP, DBP, BBP, DINP, DIDP, DNOP


Technical Data

| Characteristic                                                                                                                        | Standard       | Unit              |                | DecoTile    |                |             |     |
|---------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------|----------------|-------------|----------------|-------------|-----|
|                                                                                                                                       |                | T                 | 3.0            |             | 2.5            |             | 2.0 |
|                                                                                                                                       |                | W/L(mm)           | 0.55           | 0.3         | 0.55           | 0.3         |     |
| Type of Flooring                                                                                                                      | EN ISO 10582   | PVC Heterogeneous |                |             |                |             |     |
| Surface Treatment                                                                                                                     |                | PUR               |                |             |                |             |     |
| Size                                                                                                                                  | EN ISO 24342   | %                 | ≤ 0.15         |             |                |             |     |
| Straightness & Squareness                                                                                                             |                | %                 | ≤ 0.35         |             |                |             |     |
| Classification                                                                                                                        | EN 685         |                   | Class 23/33/42 | Class 23/31 | Class 23/33/42 | Class 23/31 |     |
| Over all Thickness                                                                                                                    | EN ISO 24346   | mm                | 3.0            | 3.0         | 2.5            | 2.0         |     |
| Wear Layer Thickness                                                                                                                  | EN ISO 24340   | mm                | 0.55           | 0.3         | 0.55           | 0.3         |     |
| Wear Resistance                                                                                                                       | EN 660-2       |                   | T              |             |                |             |     |
| Residual indentation                                                                                                                  | EN ISO 24343-1 | mm                | ≤ 0.1          |             |                |             |     |
| Dimensional stability                                                                                                                 | EN ISO 23999   | %                 | ≤ 0.25         |             |                |             |     |
| Curling                                                                                                                               |                | mm                | ≤ 2            |             |                |             |     |
| Color Fastness to Light                                                                                                               | EN ISO 105-B02 |                   | ≥ 6            |             |                |             |     |
| Castor chair test                                                                                                                     | EN ISO 4918    |                   | No Change      |             |                |             |     |
| Burning Characteristic                                                                                                                | EN 13501-1     |                   | Bfl-s1         |             |                |             |     |
| Chemical Resistance                                                                                                                   | EN ISO 26987   |                   | No Change      |             |                |             |     |
| Slip resistance                                                                                                                       | EN 13893       |                   | Class DS       |             |                |             |     |
|                                                                                                                                       | DIN 51130      |                   | R9             |             |                |             |     |
| Warranty                                                                                                                              |                |                   |                |             |                |             |     |
|  Guarantee for manufacturing defects and wear-out* |                | 10 Years          | 7 Years        | 10 Years    | 7 Years        |             |     |
| * Warranty is valid only when installed in accordance with LG Hausys's Installation & Maintenance guide.                              |                |                   |                |             |                |             |     |

Packing

| Type      | Code | Size(mm)            | Wear Layer | Packing       | m²/Carton         | Carton/Pallet |
|-----------|------|---------------------|------------|---------------|-------------------|---------------|
| Plankwood | DSW  | 3.0(T) X 180 X 920  | 0.55mm     | 20 pcs/carton | 3.31m² (35.65ft²) | 50 cartons    |
|           |      | 3.0(T) X 180 X 1200 |            | 15 pcs/carton | 3.24m² (34.88ft²) | 60 cartons    |
|           | DLW  | 3.0(T) X 180 X 920  | 0.3mm      | 20 pcs/carton | 3.31m² (35.65ft²) | 50 cartons    |
|           |      | 3.0(T) X 180 X 1200 |            | 15 pcs/carton | 3.24m² (34.88ft²) | 60 cartons    |
|           | GSW  | 2.5(T) X 180 X 920  | 0.55mm     | 24 pcs/carton | 3.97m² (42.78ft²) | 50 cartons    |
|           |      | 2.5(T) X 180 X 1200 |            | 18 pcs/carton | 3.89m² (41.85ft²) | 60 cartons    |
|           | RLW  | 2.0(T) X 180 X 920  | 0.3mm      | 30 pcs/carton | 4.97m² (53.48ft²) | 50 cartons    |
|           |      | 2.0(T) X 180 X 1200 |            | 22 pcs/carton | 4.75m² (51.15ft²) | 60 cartons    |

Structure

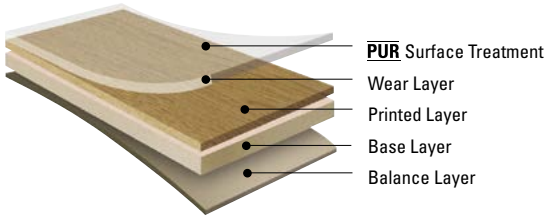

| Size (mm)  | 3.0 T                         | 2.5 T                   | 2.0 T                  |
|------------|-------------------------------|-------------------------|------------------------|
| Wood       | 180 X 920 (W/L : 0.55 / 0.3)  | 180 X 920 (W/L : 0.55)  | 180 X 920 (W/L : 0.3)  |
| X-tra Wood | 180 X 1200 (W/L : 0.55 / 0.3) | 180 X 1200 (W/L : 0.55) | 180 X 1200 (W/L : 0.3) |
| Solid      | 450 X 450 (W/L : 0.55 / 0.3)  | 450 X 450 (W/L : 0.55)  | 450 X 450 (W/L : 0.3)  |
| Woven      | 600 X 600 (W/L : 0.55 / 0.3)  |                         |                        |

Benefits

- Eco & Human-friendly Product**
  - FloorScore® and DIBt certified for low VOCs
  - Phthalate Free(DEHP, DBP, BBP, DINP, DIDP, DNOP) & Heavy Metal Free (Cd, Pb, Hg, Cr6\*)
  - Made from safer, stronger raw materials
- Excellence in Design**
  - 51 styles available in natural and modern color palette
  - High-resolution imaging and patterns for realistic wood visuals
  - New tile visuals that mirror woven patterns
- Durable Technology**
  - PUR double coating improves resistance to scratches and stains
  - Quality assured by warranties

| Type   | Code | Size(mm)           | Wear Layer | Packing       | m²/Carton         | Carton/Pallet |
|--------|------|--------------------|------------|---------------|-------------------|---------------|
| Square | DTS  | 3.0(T) X 450 X 450 | 0.55mm     | 16 pcs/carton | 3.24m² (34.88ft²) | 52 cartons    |
|        |      | 3.0(T) X 600 X 600 |            | 14 pcs/carton | 5.04m² (54.25ft²) | 30 cartons    |
|        | DTL  | 3.0(T) X 450 X 450 | 0.3mm      | 16 pcs/carton | 3.24m² (34.88ft²) | 52 cartons    |
|        |      | 3.0(T) X 600 X 600 |            | 14 pcs/carton | 5.04m² (54.25ft²) | 30 cartons    |
|        | GTS  | 2.5(T) X 450 X 450 | 0.55mm     | 19 pcs/carton | 3.85m² (41.41ft²) | 52 cartons    |
|        | RTL  | 2.0(T) X 450 X 450 | 0.3mm      | 24 pcs/carton | 4.88m² (52.31ft²) | 52 cartons    |



LG Hausys HEADQUARTER One IFC 10 Gookjegeumyoong-Ro, Yeouido-Dong, Yeongdeungpo-Gu, Seoul, 150-876, Korea Tel +82-2-6930-0907 Fax +82-2-6930-0903

© All contents of this catalog are the copyright of LG Hausys. Any duplication in any form without prior permission is strictly prohibited.

Published in 03/2015



LG Hausys www.lghausys.com

DECOTILE

Commercial and Residential Flooring  
Hospital, Retail, School, House, Office, Café,  
Restaurant, Department Store



Tile



Wood

3.0(T)X180X920(Wear Layer:0.55/0.3) | 2.5(T)X180X920(Wear Layer:0.55) | 2.0(T)X180X920(Wear Layer:0.3) [mm]



1204 | Pale Cherry



1206 | Light Classic



1243 | Vermont Oak



1242 | Brushed Timber



1203 | Honey Classic



2795 | Lego Block Pine



1202 | Natural Timber



2729 | Golden Pine



2785 | Sugar Brown



2752 | Ethnic Oak



2544 | Italian Walnut



2786 | Nutty Brown



1205 | American Oak



2724 | Sensation Pine



2736 | Shale Oak

Wood

3.0(T)X180X920(Wear Layer:0.55/0.3) | 2.5(T)X180X920(Wear Layer:0.55) | 2.0(T)X180X920(Wear Layer:0.3) [mm]



5715 | Moscado Pine



2511 | Blond Oak



1227 | Washed Oak



5713 | Mountain Pine



2754 | Ethnic Pine



1201 | Silvered Timber



5717 | Black Forest



1241 | Limed Oak



1239 | Weathered Oak



1235 | Brownie Teak



2766 | Espresso Dark



1240 | Midnight Grey

X-tra Wood

3.0(T)X180X1200(Wear Layer:0.55/0.3) | 2.5(T)X180X1200(Wear Layer:0.55) | 2.0(T)X180X1200(Wear Layer:0.3) [mm]



1228 | Bleached Pine



1244 | White Forest



1207 | Classic Hickory



1238 | Aracaju Walnut



1246 | Glazed Oak



1236 | Tamarind Walnut



1245 | Cottage Timber



1230 | Smoked Pine



1237 | Salvador Walnut



1247 | Craft Oak



1232 | Varnished Pine



1208 | Heritage Hickory



1231 | Aged Pine