

meforze[®]

vinyl floor

-  waterproof
-  flexible
-  termite proof
-  heat - resisting and fire - resistant
-  easy to maintain
-  difficult to shave
-  chemical proof
-  easy to install
-  swift to install
-  safe from clash
-  damp proof and anti dust
-  multiple combination
-  anti bacterial

ISO 9001
Quality Management System

ISO 14001
Environment Management System



Recycle



10
YEARS
WARRANTY

GERMANY
TECHNOLOGY

Using the Vinyl Floor is the right choice for your Home , Apartments, Showrooms, Offices, Store, Restaurants, Factory, Hospital and other commercial places.

Simple
&
Express
Installation



VINYL FLOOR - LANTAI VINYL

VINYL FLOOR COLOR & SURFACE

VINYL PLANK

meforze[®] VINYL FLOOR - TYPE MV
vinyl floor



MV 3501
Nevada Oak



MV 3502
African Wenge



MV 3503
Wild Walnut



MV 3504
Brazillian Walnut



MV 3505
Golden Teak



MV 3506
Smoke Pine



MV 3507
Velvet Maple



MV 3508
Java Bamboo

Size : 152.4×914.4 mm (6"×36")
Thickness : 3 mm
Wear Layer : 0.5 mm UV Protection
Surface Area : 2.787 m2
Piece/Carton : 20 Pcs/Ctn
Surface : Deep Embossed Surface

meforze[®] VINYL FLOOR - TYPE WV
vinyl floor



WV 3201
Ardenas Walnut



WV 3202
Savannah Oak



WV 3203
Sauve Pine



WV 3204
Zebra Oak

Size : 152.4×914.4 mm (6"×36")
Thickness : 3 mm
Wear Layer : 0.5 mm UV Protection
Surface Area : 2.787 m2
Piece/Carton : 20 Pcs/Ctn
Surface : Wood Surface



MV 3507
Velvet Maple

WV 3203
Sauve Pine

MV 3505
Golden Teak

WV 3201
Ardenas Walnut

MV 3506
Smoke Pine

VINYL FLOOR COLOR & SURFACE

VINYL TILE

meforze[®] VINYL FLOOR - TYPE MV
vinyl floor



MV 2501
Bavarian Cherry



MV 2502
Nordic Elm



MV 2503
Modern Wenge



MV 2504
Painted Wood

Size : 152.4×914.4 mm (6"x36")
Thickness : 2 mm
Wear Layer : 0.2 mm UV Protection
Surface Area : 4.180 m2
Piece/Carton : 30 Pcs/Ctn
Surface : Deep Embossed Surface


meforze[®] VINYL FLOOR - TYPE CV
vinyl floor



CV 3701
Angle Tile



CV 3702
Harrier Tile



CV 3703
Cushion Tile


Size : 457.2×457.2 mm (18"x18")
Thickness : 3 mm
Wear Layer : 0.5 mm UV Protection
Surface Area : 2.508 m2
Piece/Carton : 12 Pcs/Ctn
Surface : Carpet Surface



CV 3704
Thames Tile




CV 3705
Victory Tile

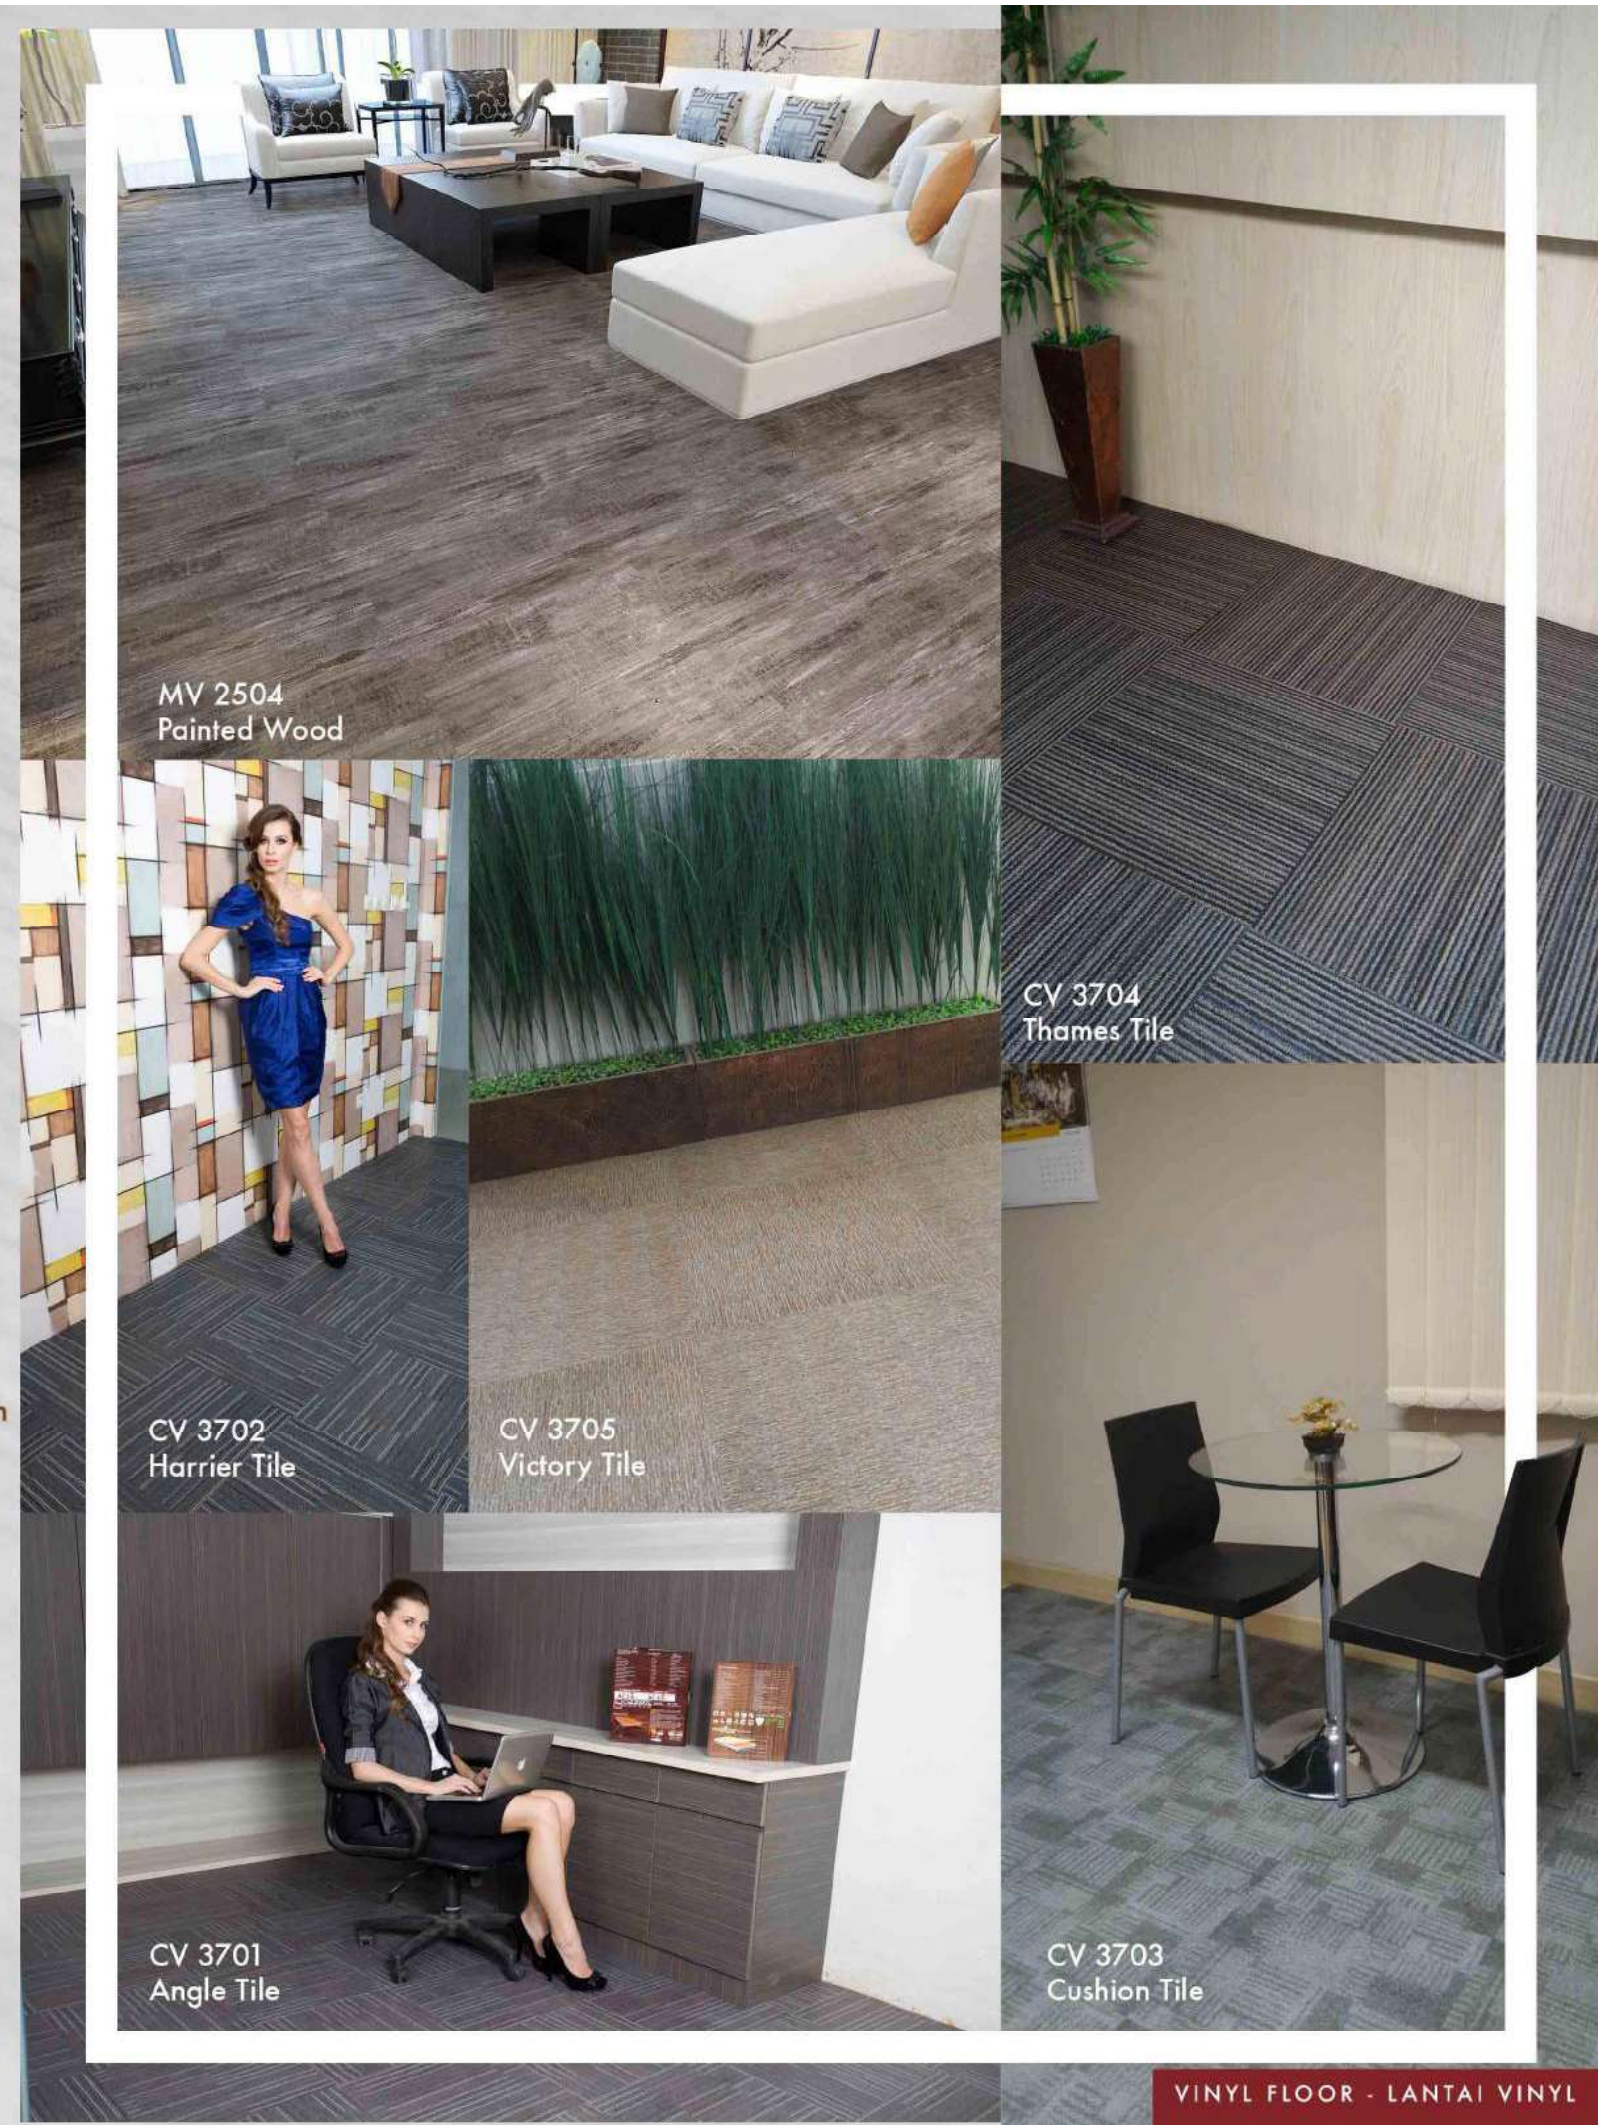



Technical Data

Slip	ASTM C-1028 ADA : Pass
Light Stability	ISO 105 B02:6 or above
Dimensional Stability	EN 434 : Pass
Curling After Exposure to Heat	EN 434 : Pass
Dimension	EN 427 : Pass
Overall Thickness	EN 428 : Pass
Wear Group Classification (1.00mm)	EN 649 Class 33,42
Abrasion Resistance	EN660-2(volume loss):6.94mm ³ /100r
Residual Indentation	EN 433 : Pass
Tensile Strength	UP to 1460 lbs/sq.Inch
Thermal Conductivity	0.186watt/mk
Castor Chair Resistance	EN 425 : Pass
Hear Resistance	ASTMF 1514 Pass
Chemical Resistance	EN 423 : Pass
Flexibility	EN 435/ASTM F 137-03 : Pass
Sound Reduction	DIN 52210 :4db
Flammability	GB/T11785-89/ASTM E648 :≥ 45 watt/cm -class*
Smoke Density	DIN4102/ASTM D2843-99 : Class B1
Electrical Resistance	EN 1081 method C : Pass

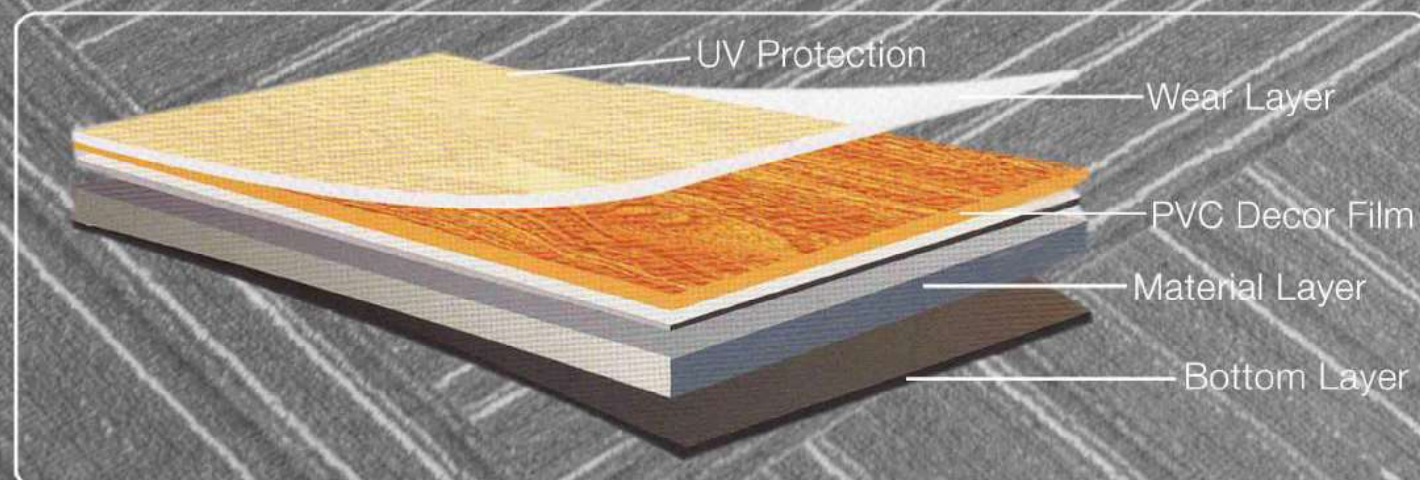

ACCESSORIES FOR VINYL



Aluminium Skirting Plin

Aluminium Skirting Plin adalah profil berbahan aluminium yang dipasang dengan cara ditempelkan pada dinding dengan lem putih dan sealant, berfungsi untuk menutupi jarak renggang antara Vinyl Floor dengan dinding. MEFORZE memiliki 1 jenis ukuran tinggi Aluminium Plin, yaitu Tinggi 10 cm.



Aluminium Adaptation Vinyl

Aluminium Adaptation Vinyl adalah profil berbahan aluminium yang dipasang dengan cara ditempelkan pada bagian lembaran terakhir (Ending) Vinyl Floor yang berbatasan dengan Lantai lain yang level ketinggiannya lebih rendah dari Vinyl Floor.



Aluminium - T

Aluminium-T adalah profil berbahan aluminium yang dipasang dengan cara ditempelkan pada bagian terakhir (Ending) Vinyl Floor yang berbatasan dengan Lantai lain yang level ketinggiannya sejajar dengan Vinyl Floor.

HOW TO INSTALL VINYL FLOOR

Vinyl Plank (Wood)



Step 1



Step 2



Step 3

Vinyl Tile (Carpet Tile)



Step 1



Step 2



Step 3

